


CRANE


**BELLOWS SEAL
GATE VALVES
&
GLOBE VALVES
Class 800
1/4" to 2"**

**Bolted Bonnet
API 602**

**ASTM A105
1975psi @ - 20 to 100F**

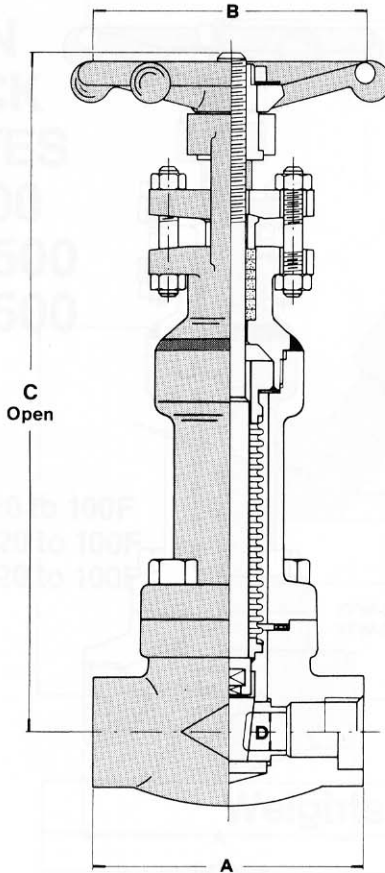

**B-3632-T
B-3632-W**

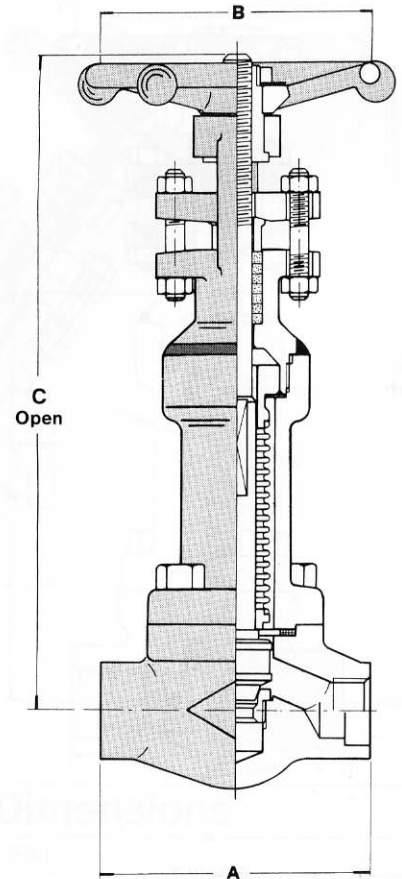

**FB-3633-T
FB-3633-W**

GATE VALVES—REGULAR PORT

BOLTED BONNET

Threaded	Socket Weld
B-3632-T	B-3632-W

GATE VALVES—FULL PORT

BOLTED BONNET

Threaded	Socket Weld
FB-3632-T	FB-3632-W

GLOBE VALVES—REGULAR PORT

BOLTED BONNET

Threaded	Socket Weld
B-3633-T	B-3633-W

GLOBE VALVES—FULL PORT

BOLTED BONNET

Threaded	Socket Weld
FB-3633-T	FB-3633-W

MATERIALS

Valves are regularly furnished in ASTM A105 carbon steel. Low temperature steels available are LF-1, LF-2, and LF-3. Alloy steels include F1, F5, F9, F11, F12, F22, Monel, Inconel, and Incoloy 825. The stainless steels available are: F304, F304H, F316, F316L, F316H, F316TI, F321, and F347. A wide selection of trims are available. Please specify your exact needs when inquiring.

Weights and Dimensions

GATE VALVES

REG.	-		1/2		3/4		1		1 1/4		1 1/2		2		-	
	FULL		3/8		1/2		3/4		1		1 1/4		1 1/2		2	
	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.
A	-	-	80	3.14	90	3.54	110	4.33	127	5.00	127	5.00	127	5.00	150	5.90
B	-	-	70	2.75	80	3.14	110	4.33	110	4.33	130	5.11	130	5.11	160	6.30
C	-	-	235	9.25	258	10.1	306	12.0	370	14.6	433	17.0	536	21.1	650	25.5
D	-	-	10	0.39	14	0.55	19	0.75	24	0.94	29	1.14	36.5	1.44	48	1.89
Kg-Lb	-	-	2.2	4.8	2.8	6.1	3.0	6.6	6.2	13.6	9.0	19.8	12.2	26.8	19.5	43.0

GLOBE VALVES

REG.	-		1/2		3/4		1		1 1/4		1 1/2		2		-	
	FULL		3/8		1/2		3/4		1		1 1/4		1 1/2		2	
	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.
A	80	3.14	80	3.14	90	3.54	110	4.33	127	5.00	155	6.10	170	6.69	210	8.26
B	70	2.75	70	2.75	80	3.14	110	4.33	110	4.33	130	5.11	130	5.11	160	6.29
C	220	8.6	220	8.6	250	9.8	275	10.8	340	13.3	410	16.1	430	16.9	541	21.2
Port	7	0.28	9	0.35	13	0.51	17.5	0.69	22.5	0.89	29.5	1.16	35	1.38	45.5	1.79
Kg-Lb	2	4.4	2	4.4	2.5	5.5	3.8	8.3	6.2	13.6	9	19.8	12.2	26.8	23	50.6