
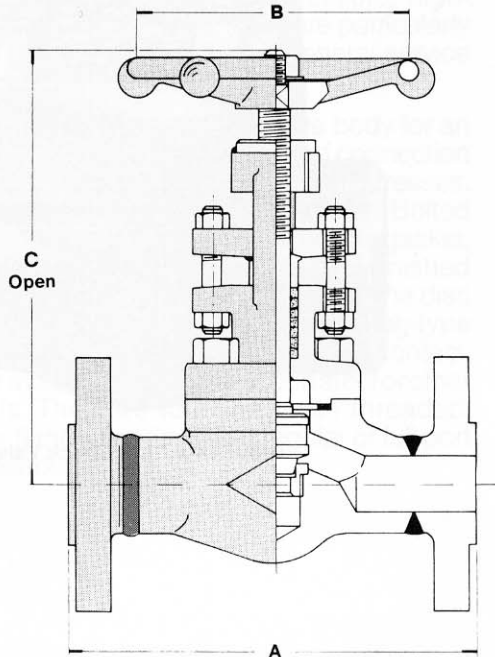


CRANE

**GLOBE VALVES
CLASS 1500
1/2" to 2"**

**Bolted Bonnet
Outside Screw & Yoke
API 602
&
ANSI B16.34
ASTM A105
3705 psi @ -20F to 100F**



FB-3844XU-F

Weights and Dimensions

FULL	1/4		3/8		1/2		3/4		1		1 1/4		1 1/2		2	
	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.
A	-	-	-	-	216	8.50	229	9.01	254	10.0	-	-	304	12.0	368	14.5
B	-	-	-	-	110	4.33	110	4.33	130	5.11	-	-	160	6.29	225	8.85
C	-	-	-	-	175	6.88	210	8.26	244	9.60	-	-	310	12.2	420	16.5
Port	-	-	-	-	13	0.51	17	0.67	21	0.83	-	-	33	1.30	37.5	1.48
Kg-Lb	-	-	-	-	8.5	18.7	10.5	23.1	16.0	35.2	-	-	31.2	68.7	51.8	114

**FULL PORT
BOLTED BONNET—FLANGED ENDS**

FB-3844XU-F
FB-3844L-F
FB-3844U-F
FB-3844LN-F

Valves are regularly furnished in ASTM A105 carbon steel. Low temperature steels available are LF-1, LF-2, and LF-3. Alloy steels include F1, F5, F9, F11, F12, F22, Monel, Inconel, and Incoloy 825. The stainless steels available are: F304, F304H, F316, F316L, F316H, F316TI, F321, and F347. A wide selection of trims are available on special order.

Flanges are welded to the body.