


CRANE

**GATE VALVES
CLASS 2500**

1/2" to 2"

**Welded Bonnet
Outside Screw & Yoke
ANSI Class 2500**

**ASTM A105
6170 psi @ -20F to 100F**

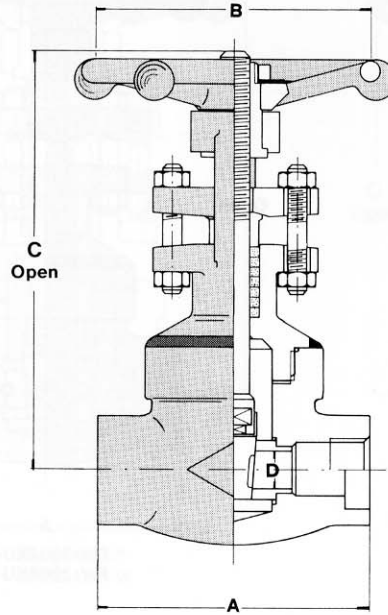

**FW-3904U-T
FW-3904U-W**

FULL PORT

WELDED BONNET

WELDED BONNET	
Threaded	Socket Weld
FW-3904U-T	FW-3904U-W

MATERIALS

Valves are regularly furnished in ASTM A105 carbon steel. They can be manufactured in LF-1, LF-2 and LF-3 carbon steels for low temperature applications. Alloy steels available include: F1, F5, F9, F11, F12, F22, Monel, Inconel, and Incoloy 825. Austenitic steels used in manufacture are: F304, F304L, F304H, F316, F316L, F316H, F316TI, F321, and F347.

Weights and Dimensions

FULL	1/4		3/8		1/2		3/4		1		1 1/4		1 1/2		2	
	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.
A	-	-	-	-	127	5.00	127	5.00	127	5.00	-	-	235	9.25	235	9.25
B	-	-	-	-	130	5.11	130	5.11	130	5.11	-	-	180	7.08	225	8.85
C	-	-	-	-	214	8.42	239	9.40	253	9.96	-	-	425	16.5	430	16.9
D	-	-	-	-	14	0.55	19	0.75	24	0.94	-	-	36.5	1.44	36	1.42
Kg-Lb	-	-	-	-	5.8	12.7	7	15.4	13.5	29.7	-	-	24.5	53.9	32	70.4